

# delice plus




## Pastry and Chocolate Cabinets with Humidity Control

The DELICE PLUS range consists of a new line of humidity controlled cabinets designed to store chocolate and fresh pastry products in perfect conditions. These cabinets are made to the quality standards of the DELICE range and can accommodate 60x40 or 60x80 cm trays.

The humidity probe, controlled by an electronic control panel, allows the humidity inside the cabinet to be controlled with utmost precision. The DELICE PLUS cabinets are available in two versions: low humidity level (45 - 65%) for the storage of chocolate and high humidity level (60 - 90%) for fresh pastry products. The range has been enriched by including a display version which features a double glazed door with toughened glass and an aluminium frame, with an interior in polished stainless steel and LED lighting.

### TECHNICAL DATA:

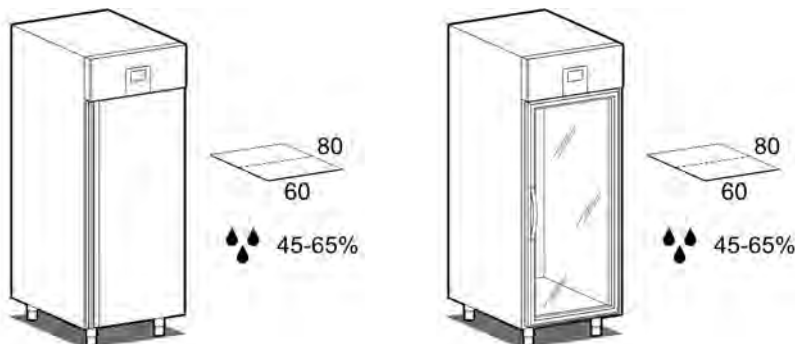

Insulation thickness	mm
External dimensions (WxDxH)	mm
Capacity	lt
Doors	nr
Trays capacity	nr
Equipment (pair of runners)	nr
Rack with trays pitch (74 positions)	mm
Electronic control	
Refrigeration type	
Temperature	°C
Relative humidity	%
Defrosting type	
Condensate water elimination	
Max absorbed power *	W
Refrigeration power *	W
Gas	
Input voltage	
Climatic class	

\*Evap. -10°C cond. +45°C

	ADP/40C	ADPV/40C
Insulation thickness	75	75
External dimensions (WxDxH)	790x1080x2140	790x1080x2140
Capacity	900	900
Doors	1	1
Trays capacity	20 600x800	20 600x800
Equipment (pair of runners)	20	20
Rack with trays pitch (74 positions)	16,5	16,5
Electronic control	touch control	touch control
Refrigeration type	indirect/soft ventilated	indirect/soft ventilated
Temperature	+4/+18	+4/+18
Relative humidity	45-65	45-65
Defrosting type	automatic by hot gas	automatic by hot gas
Condensate water elimination	automatic	automatic
Max absorbed power *	1870	1870
Refrigeration power *	1005	1005
Gas	R290	R290
Input voltage	1x230V/50Hz	1x230V/50Hz
Climatic class	5	4



Internal detail



Electronic probe for humidity control



Touch control board



Glass door version with LED lightning

## ACCESSORIES AND SURCHARGES ON REQUEST:



Pair of runners for cm 60x80 tray



Rilsan cm 60x80 shelf



S/s cm 60x80 shelf



S/s cm 60x80x2h tray



Set of Ø 100 castors



Prearranged version with valve system (deduction)




Wi-Fi supervising system (surcharge)



60Hz frequency

INSTALLATION DIAGRAM:

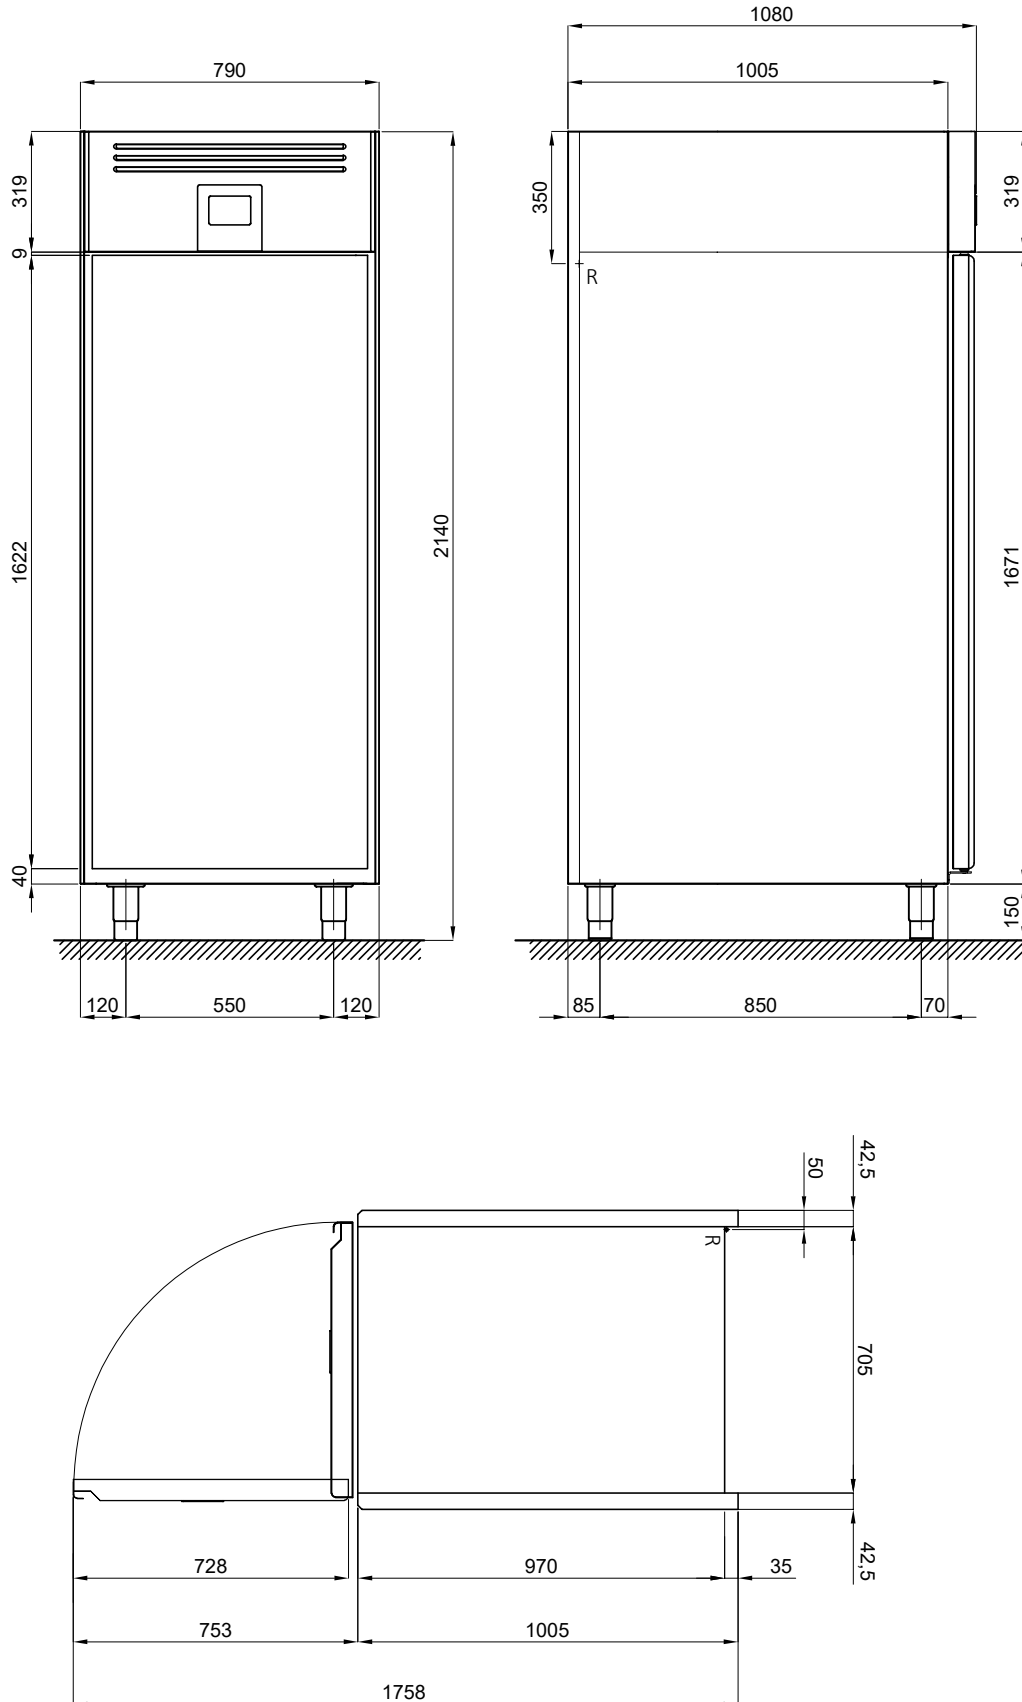

(R) INPUT VOLTAGE : 230 V ~1 - 50Hz  
Wire length 2 mt ( \* SHUKO plug)