



## Refrigerated wall unit - PR5/120

Refrigerated wall unit with 2 doors and built-in compressor, it's also available with glass doors and/or with valve system for installation of remote unit. The one-piece structure made in AISI 304 18/10 is equipped with digital temperature control +2/+10 °C, internal led light and 50 mm insulation thickness.



### TECHNICAL DATA:

#### PR5/120

Body	mm	450
External dimensions (WxDxH)	mm	1200x490x665
Capacity	lt	275
Technical compartment position		right
Doors	nr	2
Evaporators	nr	1
Equipment	nr	2 perforated shelves in each door
Control panel		digital
Cooling system		ventilated
Temperature	°C	+2/+10
Defrosting system		automatic with pause
Condensate water elimination		automatic
Max absorbed power *	W	160W*
Cooling power *	W	360W*
Gas		R290
Input voltage		1x230V/50Hz
Climatic class		5

\*Evap. -10°C cond. +45°C



Perforated shelves



Digital control



Replaceable gasket

---

## ACCESSORIES AND SURCHARGES ON REQUEST:




Wi-Fi supervising system (surcharge)



60Hz Voltage




Glass doors



Prearranged version with valve system

INSTALLATION DIAGRAM:

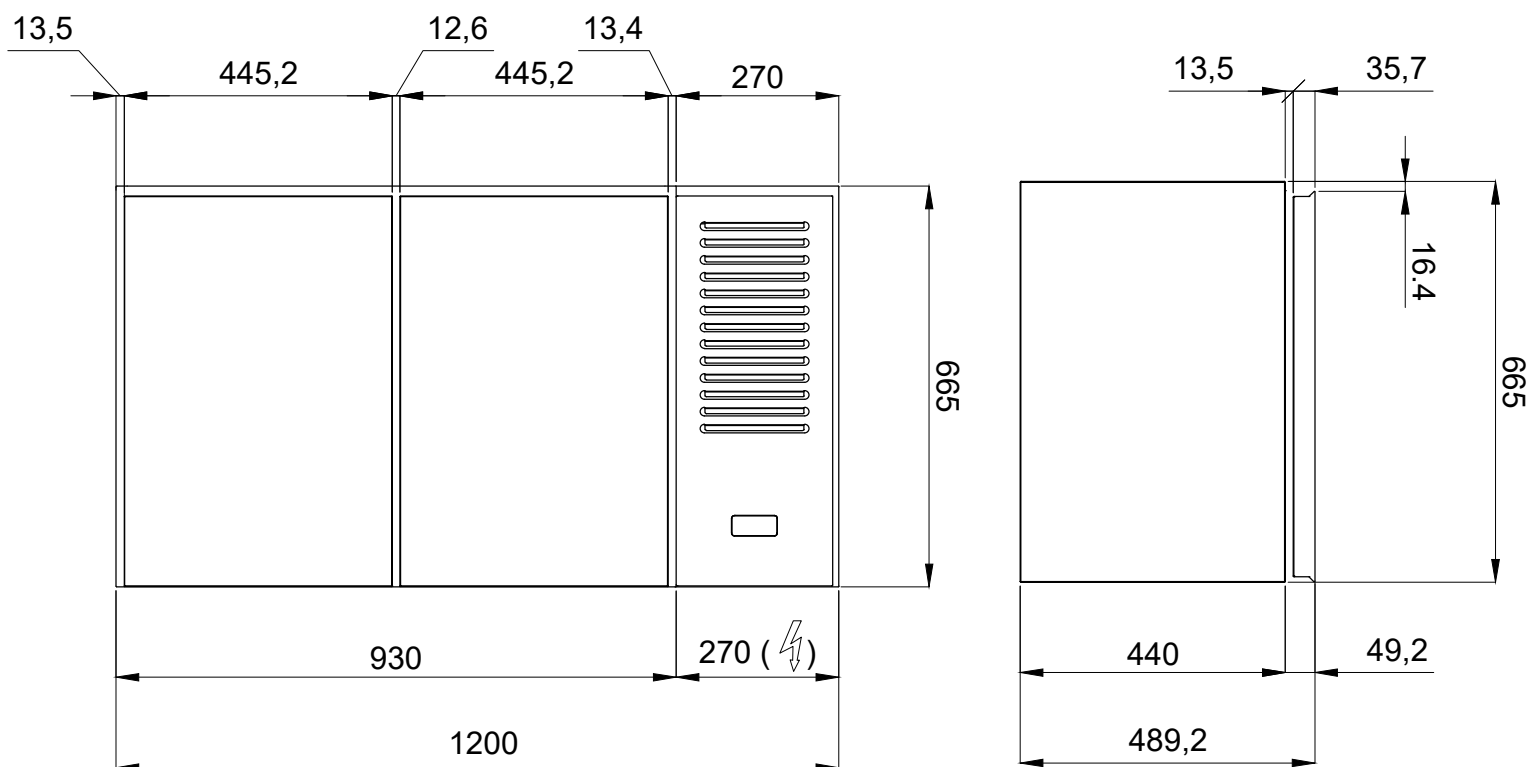

PART.  
INGOMBRO PORTE  
SCALA 1 : 40

INPUT VOLTAGE : 230 V  $\sim$ 1 - 50Hz Wire lenght  
1,5 mt ( \* SHUKO PLUG)  
REFRIGERATED POWER: (-10 / +45°C) : 360 W  
GAS : R 290 a  
MAX ABSORBED POWER: (-10 / +45°C) : 160 W

