



space

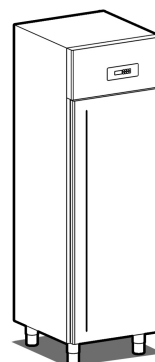

Slim refrigerated and freezer cabinets

Essentiality and reliability are the key words that come to mind in describing the refrigerated cabinets in the "SPACE" range. The one-piece structure is completely made in stainless steel with 60 mm thick insulating core made by injecting HCFC free high-density polyurethane resins. The cabinet interior is rounded at the bottom for easy cleaning, the feet and rack support structure are made in stainless steel, while the door is fitted with an easily replaceable slot-in magnetic seal. The space inside the cabinet can be fully exploited thanks to the one-piece construction and the tropicalized refrigeration system featuring a powerful low-noise compressor. Refrigeration is fan-assisted and controlled by a back-panel control board with an automatic defrost feature as well as automatic evaporation of condensation water.

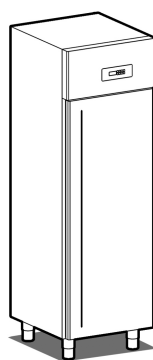

TECHNICAL DATA:

		SFN/01	SFB/01
Insulation thickness	mm	60	60
External dimensions (WxDxH)	mm	640x700x2020	640x700x2020
Capacity	lt	450	450
Equipment (Racks)	nr	3 44,5X56	3 44,5X56
Doors	nr	1	1
Control panel		digital by back panel	digital by back panel
Refrigeration type		ventilated	ventilated
Temperature	°C	-2/+8	-18/-21
Defrosting type		automatic by heating elements	automatic with hot gas
Water evaporation system		automatic	automatic
Max absorbed power*	W	240	665
Refrigerated power *	W	490	580**
Defrosting heating element	W	350	700
Gas		R290	R290
Input voltage		1x230V/50Hz	1x230V/50Hz
Climatic class		5	5

*Evap. -10°C cond. +45°C - **ASHRAE (Evap. -23,3°C cond. +54,4°C)



Detail of internal ventilation



Rack for shelves




Back panel control board



Monobloc cooling unit

ACCESSORIES AND OVERPRICE ON REQUEST:



44,5x56 shelf



Pair of runners for 44,56x56 cm shelf

Door foot pedal

Led light



Door lock with key




Kit of Ø 100 castors



Wi-Fi supervising system (overprice)



60Hz frequency



Prearranged version with valve system

INSTALLATION DIAGRAM:

